


British Double Door Grooved Check Valve



Certificate: CE
 Standard: EN 1074-3
 Connection: Grooved as ISO 6182
 Temperature: 0° C to 80° C
 W. pressure: PN 16
 Surface: FBE coating as AWWA C550

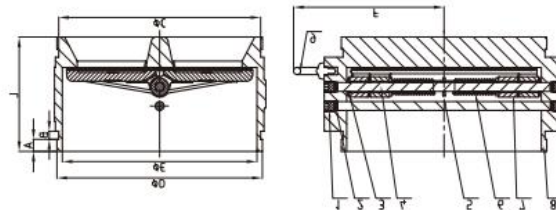

Specification

Part No.	Part	Standard Specification	Options
1	Countersunk Hex Head Screws	Carbon Steel Zinc Plated	
2	Seal Ring	EPDM	
3	Gasket	PTFE	
4	Shaft	SS420	SS304, SS316, SS431
5	Gasket	PTFE	
6	Spring	SS304	
7	Disc	SS304	SS316, QT450-10
8	Body	EN-GJS-450-10	
9	Eye Bolt	Carbon Steel Zinc Plated	

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		Dimensions (mm)						
Inch	mm	A	B	C	D	E	F	L
8"	219.1	19.1	11.1	214.4	219	200	165	160
10"	273.0	19.1	12.7	268.28	273	253	203	180
12"	323.9	19.1	12.7	318.29	324	307	228	180
14"	377.0	23.8	12.7	371.1	377	354	258	200