




Rubber Expansion Joint Union Threaded

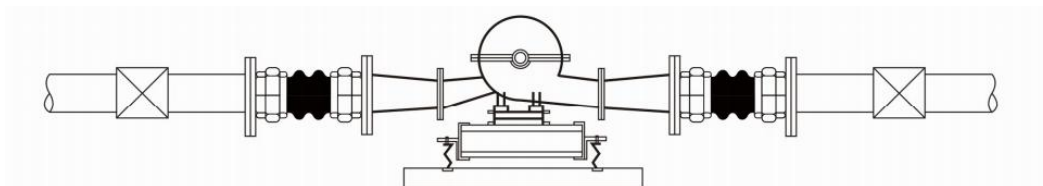


No	Name	Material
1	Union	Malleable iron SS304
2	Outer/inner rubber	NR, EPDM, NBR, FKM Nooprene oto
3	Frame	Nylon and fabric






Compression



Elongation



Transverse Deflection

Main connecting dimension					
Nominal diameter		Length (mm)	Axial displacement		Horizontal displacement (mm)
mm	inch		Compression (mm)	Extension (mm)	
15	1/2	200/220	22	5~6	22
20	3/4	200/220	22	5~6	22
25	1	200/220	22	5~6	22
32	1 1/4	200/220	22	5~6	22
40	1 1/2	200/220	22	5~6	22
50	2	200/220	22	5~6	22
65	2 1/2	245	22	5~6	22
80	3	270	22	5~6	22

OEM and ODM service are supported by Runtaida

Packing: Usually it is packed by carton case, then put into export plywood case.

Normal working pressure: PN16 (special pressure can be customized)