

British Grooved Butterfly Valve With Tamper SWitch



Certificate: UL Listed / FM Approved

Standard: EN 593 / BS 5155


Connection: Grooved as ISO 6182

Contact rating: 16A at 125/250VAC; 0.5A at 250VDC; 10A at 36VDC

Temperature: 0° C to 80° C

W. pressure: PN 16 / PN 25

Surface: FBE coating as AWWA C550

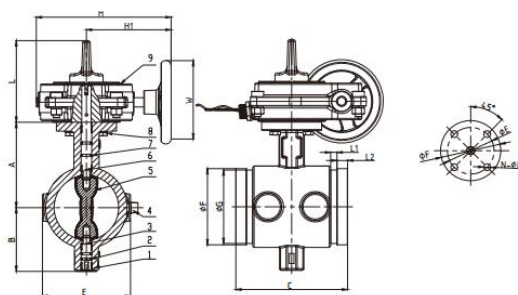

Specification

Part No	Part	Standard Specification	Options
1	Valve Body	EN-GJS-450-10	
2	O-Ring	NBR	EPDM
3	Stub Shaft	Stainless Steel, 2Cr13	SS304, SS316, SS420, SS431
4	Plug	Bronze ASTM B584	Malleable Iron Galvaized
5	Disc	EN-GJS-450-10+EPDM	SS304, SS316
6	Dive Shaft	Stainless Steel, 2Cr13	SS304, SS316, SS420, SS431
7	O-Ring	NBR	EPDM
8	Bolt and Nut	Carton Steel Zinc Plated	SS304, SS316
9	Signal Gearbox	EN-GJS-450-10	

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		Dimensions (mm)															
Inch	mm	A	B	C	E	F	G	L	L1	L2	H1	H	W	N-ΦM	S05 211	P	
																standar d	option
2.5"	65	10 2	71	152. 5	94±1. 5	73	69.09	122. 5	7.9 3	1588	127	20 2	12 5	4-Φ10	F07	12	34
2.5"	65	10 2	71	152. 5	94±1. 5	76.1	69.09	122. 5	7.9 3	15.8 8	127	20 2	12 5	4-Φ10	F07	12	34
3"	80	10 9	81	160. 0	107±1 .5	889	84.94	122. 5	7.9 3	1588	127	20 2	12 5	4-Φ10	F07	12	34
4"	100	12 8	95	167. 6	132±1 .5	114. 3	11008	122. 5	9.5 3	1588	127	20 2	12 5	4-Φ10	F07	34	12
6"	150	15 3	133	175. 3	188±1 .5	165. 1	1609	122. 5	9.5 3	15.8 8	139. 5	21 5	22 5	4-Φ10	F07	34	12
6"	150	15 3	133	175. 3	188±1 .5	168. 3	163.9 6	122. 5	9.5 3	1588	139. 5	21 5	22 5	4-Φ10	F07	34	12
8"	200	18 4	165	200. 7	236±1 .5	219. 1	214.4	122. 5	11. 1	19.0 5	198. 5	27 4	22 5	4-Φ12	F10	34	12