


RING HANGER

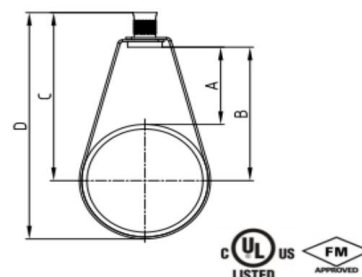

Function: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut that allows a vertical adjustment after installation.

Material: Carbon steel

Finish: Electro-galvanized, Pre-galvanized

Approvals: Underwriters' Laboratories Listed in the U.S.(UL), Canada(CUL), for use with standard steel pipe sizes 3/4" to 12". Factory Mutual Approved for steel pipe sizes 3/4" to 12" Complies with Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69.

Maximum Temperature: 343°C (650°F)

Ordering: Specify size, Finish.

Item	Size	Kurled Insert Nut		A	B	C	D	Max.Rec.Load		
		mm	in	mm	mm	mm	mm	Lbs	Kg	N
GSD9	1/2"	M10	3/8"-16UNC	33.98	35.98	58.48	70.39	299	135	1334
GSD9	3/4"	M10	3/8"-16UNC	37.82	39.82	62.32	76.93	299	135	1334
GSD9	1"	M10	3/8"-16UNC	41.98	43.98	66.48	84.44	299	135	1334
GSD9	1-1/4"	M10	3/8"-16UNC	46.68	48.68	71.18	93.54	299	135	1334
GSD9	1-1/2"	M10	3/8"-16UNC	48.98	50.98	73.48	98.89	299	135	1334
GSD9	2"	M10	3/8"-16UNC	54.68	56.68	79.18	110.59	299	135	1334
GSD9	2-1/2"	M10	3/8"-16UNC	85.2	87.2	109.7	147.55	339	153	1512
GSD9	3"	M10	3/8"-16UNC	92.08	94.08	116.58	162.74	419	189	1868
GSD9	3-1/2"	M10	3/8"-16UNC	92.08	94.08	116.58	169.09	499	225	2224
GSD9	4"	M10	3/8"-16UNC	104.98	106.98	129.48	188.34	599	270	2668
GSD9	5"	M12	1/2"-13UNC	123.75	125.75	154.25	227.38	799	360	3558
GSD9	6"	M12	1/2"-13UNC	142.15	144.15	172.65	259.28	1059	477	4714
GSD9	8"	M12	1/2"-13UNC	180	182	210.5	322.75	1619	729	7205
GSD9	10"	M16	5/8"-11UNC	219	221	256	397	2339	1053	10408
GSD9	12"	M16	5/8"-11UNC	265	267	302	468.45	3159	1422	14055