


DOUBLE SCREW BUNDLE-K07、K04

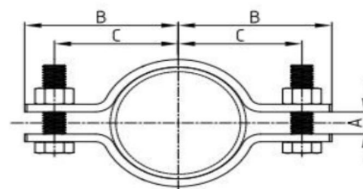

Function: Designed to be used in the suspension of non-insulated pipe lines. Both sides of the product are equipped with bolts and nuts for easy installation.

Material: Carbon steel

Finish: Electro-galvanized (Hot-Dip Galvanized with electro-galvanized hardware upon request)

Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), for use with standard steel pipe sizes 1/2" to 8". Factory Mutual Approved for steel pipe sizes 3/4" to 8". Complies with Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 4) which supersedes ANSI/MSS SP-69

Maximum Temperature: 343°C (650°F)

Ordering: Specify size, Finish.

Item	Size	Kurl'd Insert Nut		A	B	C	Max.Rec.Load		
		m m	in	m m	mm	m m	Lbs	Kg	N
GSL9	1/2"	M8	5/16"-18UNC	10.2	39	26	299	135	1334
GSL9	3/4"	M8	5/16"-18UNC	11.8	40.5	27.5	299	135	1334
GSL9	1"	M8	5/16"-18UNC	11.9	47.5	34.5	299	135	1334
GSL9	1-1/4"	M8	5/16"-18UNC	11.9	49.5	36.5	299	135	1334
GSL9	1-1/2"	M8	5/16"-18UNC	12	54	41	299	135	1334
GSL9	2"	M12	1/2"-13UNC	14.8	69	53	299	135	1334
GSL9	2-1/2"	M12	1/2"-13UNC	14.5	82.5	66.5	339	153	1512
GSL9	3"	M12	1/2"-13UNC	16.4	92.5	76.5	419	189	1868
GSL9	3-1/2"	M12	1/2"-13UNC	17.1	98	82	499	225	2224
GSL9	4"	M12	1/2"-13UNC	17.8	111.5	91.5	599	270	2668
GSL9	5"	M12	1/2"-13UNC	16.8	119	99	799	360	3558
GSL9	6"	M12	1/2"-13UNC	22.6	132	112	1059	477	4714
GSL9	8"	M12	1/2"-13UNC	22.4	157.5	137.5	1619	729	7205