

style RF-200/-200E/-200G

Braided hose with straight nipple/elbow nipple / grooved connection




Listings:

Connection: 1"/DN25 x 1/2" / DN15 or 3/4" / DN20, NPT Or BSPT

Hose Diameter: O.D.26.8mm/1-1/16" Flow: 21.0mm/13/16"

Maximum service pressure: 14bars/ 203psi

Maximum ambient temperature: 66° C/150° F(UL)

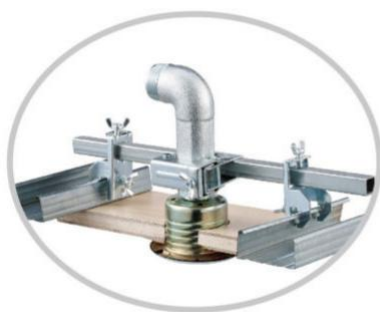

Flexible hose		FM approval data					cULus listing data			
		Style RF-200/200G with straight nipple				RF-200E w.straight nipple				
Model	Sprinkler thread size	Max.allow. Sprinkler K-factor	Max.no. of 90° bends	Min.bending radius	EQL of 33.7mm/1" SCH40 Pipe	EQL of 33.7mm/1 SCH40 Pipe	Max.allow. Sprinkler K-factor	Max.no. of 90° bends	Min bending radius	EQL of 33.7mm/1" SCH40 Pipe
	DN/in.	Metric /Impri	n x 90°	mm /inch	meters /feet	meters /feet	Metric /Impri	n x 90°	mm /inch	meters /feet
RF-200-700	15 1/2	115/8.0	1	250	8.1 /26.7	8.0/26.5	81 /5.6	2	100	7.6 /25.0
	20 3/4	202/14.0		9.8	6.5/21.5	5.1/16.8	115/8.0		3.9	6.4/21.0
RF-200-1000	15 1/2	115/8.0	2	250	12.9/42.6	12.4/40.8	81 /5.6	3	100	10.1/33.0
	20 3/4	202/14.0		9.8	12.0/39.6	10.5/34.2	115/8.0		3.9	11.0/36.0
RF-200-1200	15 1/2	115/8.0	3	250	16.2/53.2	15.4/50.4	81 /5.6	3	100	11.9/39.0
	20 3/4	202/14.0		9.8	15.7/51.6	13.9/45.8	115/8.0		3.9	13.1/43.0
RF-200-1500	15 1/2	115/8.0	4	250	20.6/67.8	20.0/65.7	81 /5.6	3	100	15.2/50.0
	20 3/4	202/14.0		9.8	19.3/63.5	17.9/58.7	115/8.0		3.9	15.8/52.0
RF-200-1800	15 1/2	115/8.0	4	250	25.1/82.4	24.6/81.0	81 /5.6	3	100	17.7/58.0
	20 3/4	202/14.0		9.8	22.9/75.4	21.7/71.5	115/8.0		3.9	19.2/63.0