


Malleable iron Reducing Tee (130R)



- Certificate: FM Approved / UL Listed / BSI / LPCB / NSF 61
- Size: DN15×10 - DN100×80
- Pressure: 2.5 Mpa / PN25
- Dimensions: BS EN10242
- Material: Malleable iron BS EN1562
- Threaded: BSPP (ISO228) / BSPT (ISO7-1)
- Surface: Black / Electrical galvanized / Hot-dip galvanized

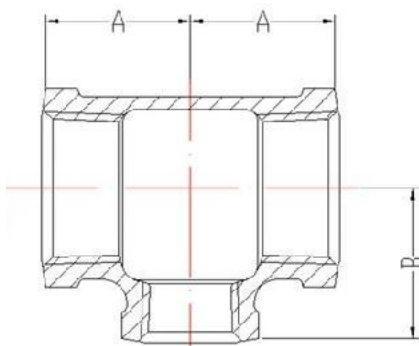

Available size

SIZE		A (MM)	B (MM)	PCS/CTN.
1/2"×3/8"	15×10	25	25	/
3/4"×1/2"	20×15	29	30	150
1"×3/8"	25×10	29	31	100
1"×1/2"	25×15	31	33	100
1 "x 3/4"	25×20	34	35	100
1-1/4"×3/8"	32×10	31	36	64
1-1/4"×1/2"	32×15	34	37	64
1-1/4"×3/4"	32×20	36	40	64
1-1/4"×1"	32×25	40	41	64
1-1/2"×1/2"	40×15	35	41	52
1-1/2"×3/4"	40×20	37	43	52
1-1/2"×1"	40×25	41	45	42
1-1/2"×1-1/4"	40×32	45	47	42
2 "x1/2"	50×15	37	47	40
2 "x 3/4"	50×20	40	49	40
2 "x1"	50×25	43	51	30
2 "x1-1/4"	50×32	47	53	30
2"x1-1/2"	50×40	51	54	24

2-1/2"x1/2"	65×15	40.5	56	24
2-1/2"x3/4"	65×20	43.5	57	24
2-1/2"x1"	65×25	47.5	59	20
2-1/2"x1-1/4"	65×32	51.5	61	16
2-1/2"x1-1/2"	65×40	54.5	61	16
2-1/2"x2"	65×50	59.5	64	16
3 "x1/2"	80×15	42.5	64	12
3 "x 3/4"	80×20	45.5	65	12
3 "x1"	80×25	49.5	67	12
3 "x1-1/4"	80×32	54.5	69	12
3 "x1-1/2"	80×40	57.5	71	12
3 "x 2"	80×50	61.5	71	10
3 "x2-1/2"	80×65	71.5	74	10
4 "x1/2"	100×15	49.5	78	8
4 "x3/4"	100×20	53.5	79	8
4 "x1"	100×25	56.5	82	8
4 "x1-1/4"	100×32	60.5	85	6
4 "x1-1/2"	100×40	62.5	85	6
4 "x2"	100×50	68.5	86	6
4 "x2-1/2"	100×65	77.5	89	6
4 "x3"	100×80	82.5	90	6