


Stainless Steel Threaded Reducing Tee



- Size: DN8×6 -DN100×80 (1/4"×1/8"-4"×3")
- Pressure: CLASS 150 / CLASS300 (10BAR-20BAR)
- Dimensions: ISO 4144/SP114/DIN2986/EN10241/ASME A733
- Material: ASTM351-CF8& CF8M,304 & 304L & 316 & 316L & 201
- Threaded: ISO7-1/ISO228/DIN2999/BS21/ASME B1.20.1
- Technology: Precision Investment Casting, Pipes SCH40&SCH80

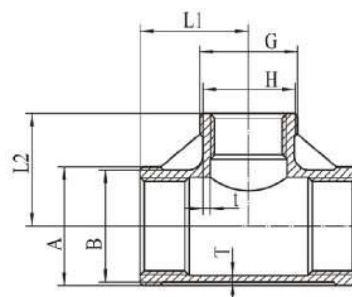

Available size

Inch	DN	L1	L2	G	H	t	A	B	T
1/4"×1/8"	8×6	18	18	14	13	1.6	18	16.5	1.6
3/8"×1/4"	10×8	20	22	18	16.5	1.6	21.5	20	1.6
1/2"×1/4"	15×8	24	24	18	16.5	1.6	26	24.5	1.8
1/2"×3/8"	15×10	26	25	21.5	20	1.6	26	24.5	1.8
3/4"×3/8"	20×10	28	28	21.5	20	1.6	31.5	30	1.8
3/4"×1/2"	20×15	29	30	26	24.5	1.8	31.5	30	1.8
1"×1/2"	25×15	32	33	26	24.5	1.8	39	37.5	2
1"×3/4"	25×20	34	35	31.5	30	1.8	39	37.5	2
1 1/4"×1/2"	32×15	33.2	38.5	27	25	1.8	49.5	47	2.3
1 1/4"×3/4"	32×20	38	40	31.5	30	1.8	48	46.5	2.4
1 1/4"×1"	32×25	40	42	39	37.5	2	48	46.5	2.4
1 1/2"×1/2"	40×15	35	41	27	25	1.8	56	53.5	2.3
1 1/2"×3/4"	40×20	39	41.7	32	30.5	1.8	55	53.5	2.5
1 1/2"×1"	40×25	41	45	39	37.5	2	55	53	2.5
1 1/2"×1 1/4"	40×32	45	48	48	46.5	2.4	55	53	2.5
2"×3/4"	50×20	40	50	31.5	30	1.8	67.5	65.5	2.8
2"×1"	50×25	42	52	39	38	2	67.5	65.5	2.8
2"×1 1/4"	50×32	48	54	48	46.5	2.4	67.5	65.5	2.8
2"×1 1/2"	50×40	52	55	55	53	2.5	67.5	65.5	2.8
2 1/2"×3/4"	65×20	45	59	31.5	30	1.8	83.5	82	3.3
2 1/2"×1 1/2"	65×40	55	62	55	53	2.5	83.5	82	3.3
2 1/2"×2"	65×50	60	65	67.5	65.5	2.8	83.5	82	3.3
3"×2"	80×50	62	72	67.5	65.5	2.8	98.5	95.5	3.8
3"×2 1/2"	80×65	72	75	84	82	3.3	98.5	95.5	3.8
4"×2 1/2"	100×65	78	90	84	82	3.3	124.5	121.5	4.3
4"×3"	100×80	83	91	98.5	95.5	3.7	124.5	121.5	4.3