

Dismantling joints PN10

DISMANTLING JOINT

ISO2531: 2000/BSEN545:2000




1,2 ,3:Ductile iron body

5,6 :carbon steel zinc coating

4:epdm rubber seal

fusion boned epoxy coating over 250 micron

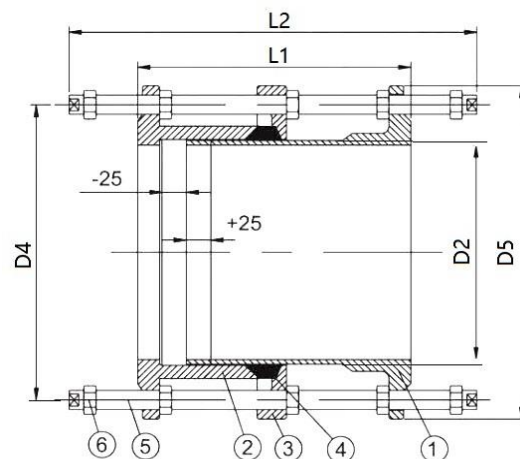

Dimensions in mm

SIZE	D2	D4	D5	ØdxN		L1	L2
DN40	56	110	150	M16×280	4	190	280
DN50	66	125	165	M16×280	4	190	280
DN60	77	135	175	M16×280	4	190	280
DN65	82	145	185	M16×280	4	190	280
DN80	98	160	200	M16×310	8	210	310
DN100	118	180	220	M16×310	8	210	310
DN125	144	210	250	M16×310	8	210	310
DN150	170	240	285	M20×320	8	210	320
DN200	222	295	340	M20×340	8	230	340
DN250	274	350	400	M20×360	12	230	360
DN300	326	400	455	M20×360	12	235	360
DN350	378	460	505	M20×360	16	245	360
DN400	429	515	565	M24×370	16	265	370
DN450	480	565	615	M24×390	16	265	390
DN500	532	620	670	M24×390	20	270	390
DN600	632	725	780	M27×410	20	285	410
DN700	735	840	895	M27×410	24	285	410
DN800	842	950	1015	M30×460	24	320	460
DN900	945	1050	1115	M30×460	28	320	460
DN1000	1048	1160	1230	M33×480	28	340	480
DN1100	1152	1270	1340	M33×480	32	340	480
DN1200	1255	1380	1455	M36×520	32	360	520
DN1400	1462	1590	1675	M39×560	36	380	560
DN1500	1565	1700	1785	M39×590	36	400	590
DN1600	1668	1820	1915	M45×600	40	420	600
DN1800	1875	2020	2115	M45×640	44	420	640
DN2000	2082	2230	2325	M45×640	48	430	640