


Mechanical Tee With Grooved Branch



- Certificate: FM Approved / UL Listed
- Size: 2"×1 1/4" - 8"×4" (DN 50×32 - DN 200×100)
- Pressure: 300 psi
- Dimensions: ANSI B16.3
- Material: ASTM A536, GRADE 65-45-12, QT450-10
- Threaded: ASME B1.20.1, ISO 7-1, GB 7306
- Surface: P: Painted E: Electroplated B: Black S: Epoxy G: Hot-dip Galvanized

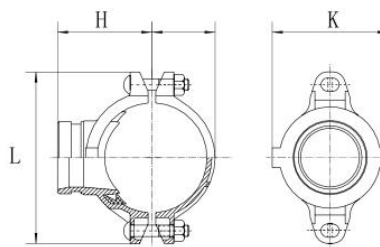

Available size

SIZE		OD SIZE	Φ(MM)	L (MM)	K (MM)	H (MM)
2"×1 1/4"	DN50XDN32	60.3X42.4	75	116	68	75
2"×1 1/2"	DN50XDN40	60.3X48.3	75	116	68	75
2 1/2"×1 1/4"	DN65XDN32	73.0X42.4	92	128	76	83
2 1/2"×1 1/2"	DN65XDN40	73.0X48.3	92	128	76	83
2 1/2"×1 1/4"	DN65XDN32	76.1X42.4	96	128	76	83
2 1/2"×1 1/2"	DN65XDN40	76.1X48.3	96	128	76	83
3"×1 1/4"	DN80XDN32	88.9X42.4	108	151	83	86
3"×1 1/2"	DN80XDN40	88.9X48.3	108	151	83	86
3"×2"	DN80XDN50	88.9X60.3	108	151	83	101
4"×2 1/2"	DN100XDN65	108.0X76.1	130	180	100	110
4"×3"	DN100XDN80	108.0X88.9	130	180	100	124
4"×1"	DN100XDN25	114.3X33.7	136	183	100	76
4"×1 1/4"	DN100XDN32	114.3X42.4	136	183	100	86
4"×1 1/2"	DN100XDN40	114.3X48.3	136	183	100	86
4"×2"	DN100XDN50	114.3X60.3	136	183	100	105
4"×2 1/2"	DN100XDN65	114.3X73.0	136	183	100	110
4"×2 1/2"	DN100XDN65	114.3X76.1	136	183	100	110
4"×3"	DN100XDN80	114.3X88.9	136	183	100	124
5"×1 1/4"	DN125XDN32	139.7X42.4	164	219	110	92
5"×1 1/2"	DN125XDN40	139.7X48.3	164	219	110	92
5"×2"	DN125XDN50	139.7X60.3	164	219	110	105
5"×2 1/2"	DN125XDN65	139.7X76.1	164	219	110	110
5"×3"	DN125XDN80	139.7X88.9	164	219	110	124
5"×1 1/4"	DN125XDN32	141.3X42.4	164	219	110	92
5"×1 1/2"	DN125XDN40	141.3X48.3	164	219	110	92
5"×2"	DN125XDN50	141.3X60.3	164	219	110	105
5"×2 1/2"	DN125XDN65	141.3X76.1	164	219	110	110

6"×1 1/4"	DN150XDN32	165.1X42.4	190	245	123	90
6"×1 1/2"	DN150XDN40	165.1X48.3	190	245	123	90
6"×2"	DN150XDN50	165.1X60.3	190	245	123	105
6"×2 1/2"	DN150XDN65	165.1X76.1	190	245	123	110
6"×3"	DN150XDN80	165.1X88.9	190	245	123	130
6"×4"	DN150XDN100	165.1X114.3	190	245	125	159
6"×1 1/4"	DN150XDN32	168.3X42.4	192	250	127	90
6"×1 1/2"	DN150XDN40	168.3X48.3	192	250	127	90
6"×2"	DN150XDN50	168.3X60.3	192	250	127	105
6"×2 1/2"	DN150XDN65	168.3X73.0	192	250	127	110
6"×2 1/2"	DN150XDN65	168.3X76.1	192	250	127	110
6"×3"	DN150XDN80	168.3X88.9	192	250	127	130
6"×4"	DN150XDN100	168.3X114.3	192	250	127	159
8"×2"	DN200XDN50	219.1X60.3	240	302	150	105
8"×2 1/2"	DN200XDN65	219.1X76.1	240	302	150	115
8"×3"	DN200XDN80	219.1X88.9	240	302	150	134
8"×4"	DN200XDN100	219.1X114.3	240	302	150	167