


BS / EN Butt Weld Cap



- Certificate: ISO
- Standard: EN 10253-1 / EN 10253-2 / EN 10253-3
- Material -1: Carbon steel S235, P235TR2, P265GH
- Material -2: Stainless steel SS 304, SS 316L
- W.pressure: Equal to same straight pipe
- End: Straight edges / bevelled for welding
- Surface: Original / Sandblast / Black painting / HDG

Available size

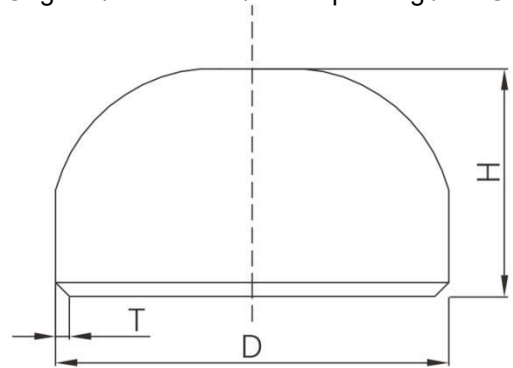

SIZE			T (mm)	H (mm)
NPS	DN	OD (mm)		
1/2"	DN 15	21.3	2.0 / 2.6 / 3.2 / 4.0 / 5.0 / 7.1	25
3/4"	DN 20	26.9	2.3 / 2.6 / 3.2 / 4.0 / 4.5 / 5.6 / 8.0	25
1"	DN 25	33.7	2.6 / 3.2 / 4.0 / 4.5 / 5.6 / 6.3 / 8.8	25
1-1/4"	DN 32	42.4	2.6 / 3.6 / 4.0 / 5.0 / 6.3 / 8.0 / 10.0	38
1-1/2"	DN 40	48.3	2.6 / 3.6 / 4.0 / 5.0 / 6.3 / 8.0 / 10.0	38
2"	DN 50	60.3	2.9 / 3.6 / 4.0 / 5.6 / 7.1 / 8.8 / 11.0	38
2-1/2"	DN 65	76.1	2.9 / 3.6 / 5.6 / 7.1 / 8.0 / 10.0 / 14.2	38
3"	DN 80	88.9	3.2 / 4.0 / 5.6 / 8.0 / 8.8 / 11.0 / 16.0	51
4"	DN 100	114.3	3.6 / 4.5 / 6.3 / 8.8 / 11.0 / 14.2 / 17.5	64
5"	DN 125	139.7	4.0 / 5.0 / 6.3 / 10.0 / 12.5 / 16.0 / 20.0	76
6"	DN 150	165.1 / 168.3	4.0 / 4.5 / 5.6 / 7.1 / 11.0 / 14.2 / 17.5 / 22.2	89
8"	DN 200	219.1	4.5 / 6.3 / 7.1 / 8.0 / 12.5 / 16.0 / 17.5 / 22.2	102
10"	DN 250	273.0	5.0 / 6.3 / 8.8 / 10.0 / 12.5 / 16.0 / 22.2 / 30.0	127
12"	DN 300	323.9	5.6 / 7.1 / 8.8 / 10.0 / 12.5 / 17.5 / 25.0 / 32.0	152
14"	DN 350	355.6	5.6 / 8.0 / 10.0 / 12.5 / 16.0 / 20.0 / 28.0 / 36.0	165
16"	DN 400	406.4	6.3 / 8.8 / 10.0 / 12.5 / 17.5 / 22.2 / 30.0 / 40.0	178
18"	DN 450	457	6.3 / 10.0 / 11.0 / 12.5 / 17.5 / 22.2 / 32.0 / 45.0	203
20"	DN500	508	6.3 / 10.0 / 11.0 / 12.5 / 17.5 / 25.0 / 36.0 / 50.0	229
24"	DN 600	610	6.3 / 10.0 / 12.5 / 17.5 / 25.0 / 30.0 / 45.0 / 60.0	267